

COMPOSITES

Datasheet Sorlic®XF


Lantor Sorlic®XF

- The cost effective solution for closed mould processes
- Is used as core material and infusion medium
- Is a pressure stable polyester nonwoven and compatible with all regular types of resins, including Polyester, Vinylester, Phenolic and Epoxy
- Is suitable for closed mould processes, including Infusion, RTM Light, RTM Heavy

Applications Lantor Sorlic®XF

- Marine: hulls, decks and structures of boats and yachts
- Transportation: parts and panels of cars, trailers, trucks and RV's
- Mass transit: interior and exterior of trains, light rail and buses
- Leisure: kayaks, surfboards, pools and tubs
- Industrial: cladding panels, fans, containers and tanks
- Wind Energy: nacelle and spinners

The information contained in this document has been compiled in good faith by Lantor BV, but nevertheless no representation or warranty is given as to the accuracy or completeness of the (technical) information provided herein. Lantor BV can not be held liable of any damages arising from any (printing) errors or omissions in this information. Lantor BV reserves the right to make changes with respect to the information provide at any time without further notice.

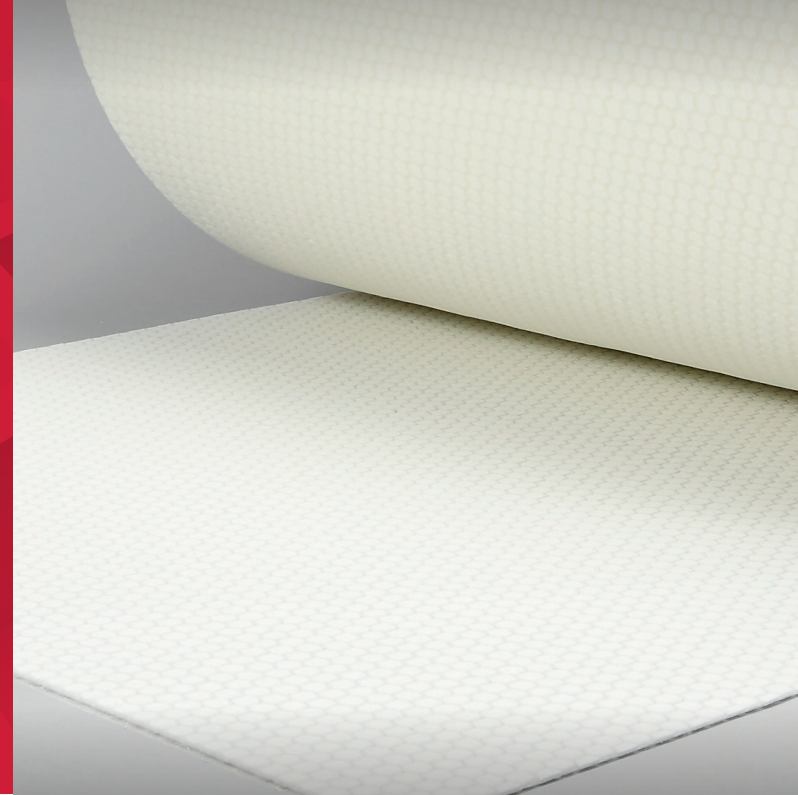

Dimensional data

Properties		XF 2	XF 3	XF 4	XF 5	XF 6	XF 10
Thickness	mm	2,0	3,0	4,0	5,0	6,0	10,0
Roll length	m	80	50	40	30	25	15
Roll width	m	1,27	1,27	1,27	1,27	1,27	1,27
Thickness loss at 0,8 bar	%	<10	<10	<10	<10	<10	<10
Max processing temp.	°C	170	170	170	170	170	170
Resin uptake	kg/m ²	1,0	1,4	1,9	2,4	2,8	5,4
Dry weight	g/m ²	135	180	250	320	345	625
Density impregnated	kg/m ³	600	600	600	600	600	600

Typical mechanical properties of Lantor Sorlic®XF* impregnated with unsaturated polyester resin

Mechanical properties	unit	value	test method
Flexural strength	MPa	8	ASTM D790
Flexural modulus	MPa	800	ASTM D790
Tensile strength across layers	MPa	4	ASTM C297
Compression strength: 10% strain	MPa	8	ISO 844
Shear strength	MPa	3,5	ASTM C273-61
Shear modulus	MPa	35	ASTM C273-61
*Sorlic®XF 3			

Information

PO box 45 - 3900 AA
Verlaat 22 - 3901 RG
Veenendaal
The Netherlands
T +31(0) 318 537 111
composites@lantor.com

enabling performance
www.lantor.com

